

KUNGFUPAO SF-K2 USER MANUAL



CONTENTS

DISCLAIMERA1
PREFACEA1
1 PRODUCT INTRODUCTION A2 1.1 PRODUCT OVERVIEW A2 1.2 PRODUCT ACCESSORIES A3 1.3 BUTANE GAS A3
2 TECHNICAL PARAMETER
3 SCREEN OPERATION GUIDE
3.1 BACK PANEL INTRODUCTIONA5
3.2 DMX PARAMETER LISTA6
4 SAFETY NOTICEA6
5 MACHINE OPERATION ····································
5.1 ADJUST ANGLEA8
5.2 INSTALL MACHINE ······A9
5.3 INSTALL BUTANE GASA9
5.4 FILL GRANULEA10
5.5 FILL GRANULE ••••••••••••••••••••••••••••••••••••
6 START TO OPERATEA10
6.1 TURN ON MACHINE' S POWERA11
6.2 DMX CONTROLA11
6.3 IMPULSE CONTROLA11
6.4 DISCONNECT POWER AND CLEAR
7 FAILURE HANDLINGA12
8 WARRANTY INSTRUCTIONS
9 WARRANTY CARD

DISCLAIMER


Please read the manual carefully before installing and using this product. Fallure to read or comply with thismanual may result in injury to products and personnel, and park Fabrica shall not be responsible for this.

This product is a professional machine, we do not assume any responsibility for accidents or losses caused by theuse or maintenance of this product by personnel without professional training and permission. If the information contained in the manual or the product specifications are changed, Spark Fabrica will not informou further and responsible for any errors or omissions.

Our company reserves the right to modify the user manual at any time

PREFACE


This manual includes warning, caution and notice concerning the safe operation of equipment. These warning, caution and notice come with the following icons. Please read them carefully!

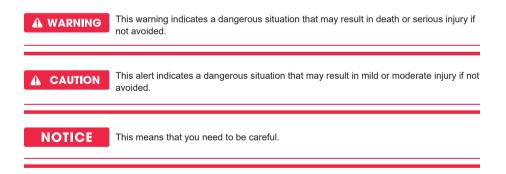

1. PRODUCT INTRODUCTION

Kungfupao is a new spark device without gunpowder and □reworks invented by Changsha Spark Technology Electronics Co.,Ltd. It is a new product which produce istant spark e□ect. This product can be widely used in weddings, opening celebration, meeting, sports events, concert and so on.

1.1 PRODUCT OVERVIEW

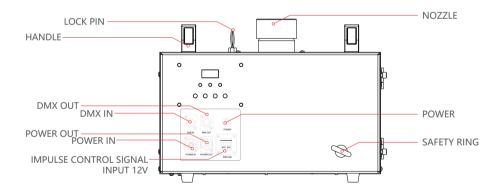

1.2 PRODUCT ACCESSORIES

1.6M Power Plug
User Manual
3 Meters Power Pair Cable (optional)
3 Meters DMX Pair Cable


NOTICE

Open the package carefully and check to make sure the goods are in good condition.

ww.sparkfabrica.com

1.3 BUTANE GAS

Granule for this product is liquefied butagas, and the gas cylinder is universal portable butagas cylinder. Its dimension is 68mm*180mm, and volume is 220±5g. Please use qualifed products from formal manufacturer.



2 TECHNICAL PARAMETER

Identification -	Brand	SPARK FABRICA
Identification -	Name	Kungfupao/SF-K2
AC Power	Input Voltage & Frequency	100-260V, 50 / 60HZ
	Power	10W
	Granule	Composite Ti (medium)
Granule _	Powder Consumption (100% Output)	1g
	Height	3M
	Powder Tank Capacity	70g
– Gas Cylinder	Tank type	Portable Butagas Cylinder
	Number Of Installed Gas Tanks	2
	Gas Consumption	8g-10g /min
Woight	Net Weight	16Kg
Weight –	Gross Weight	18Kg
Dimension _	Machine Dimensions - L*W*H	400*350*285mm
Bimonolon -	Machine Packing Dimensions - L*W*H	455*400*310mm

2.1 FUNCTIONAL CHARACTERISTICS


- •Cold sparks projected up to 3m high
- •2 DMX channels
- Tilt detector
- •TFT screen which displays the operating status of the machine
- •Works with a low residue metal powder that generates no smoke, odours or other harmful gases.
- •Automatic cleaning to avoid the accumulation of residues in the combustion chamber

www.sparkfabrica.com

SPARK FABRICA

3 SCREEN OPERATION GUIDE

3.1 BACK PANEL INTRODUCTION

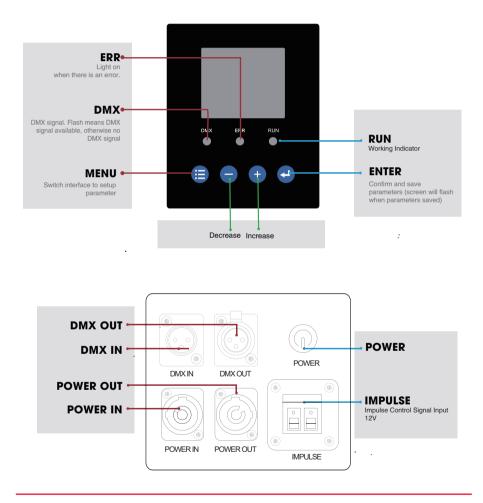

3.2 DMX PARAMETER LIST

FIRST CHANNEL	FUNCTION
0-9	Fire off
10-255	Fire on
SECOND CHANNEL	FUNCTION
SECOND CHANNEL 0-9	FUNCTION Close gas loading

4 SAFETY NOTICE

NOTICE

Don't try to repair the unit by yourself or you invalidate the warranty. Repairs must only be car ried out by a qualied technician.

NOTICE Keep the unit dry and do NOT use in rain or snow.

NOTICE

Make sure the lid of the feeding hopper is well covered when using the unit. Accidentally burning of Ti powder can only be extinguished with sand. Composite Ti should be kept away from mois ture and stored in a dry, sealed environment.

NOTICE

Do not mount the product on a ammable surface (linoleum, carpet, wood, paper, carton, plastic, etc.). Keep audience and ammable material at a minimum distance of 3m from SPARK JET PRO. Make sure the sparks shoot out by the unit can NOT touch any objects.

NOTICE


Clean the unit before and a □ er the show. Make sure that no Composite Ti remains in the pipe and the nozzle. Remove all residues of Composite Ti aggregate, otherwise it will affect the shooting effect or even damage the unit.



5 MACHINE OPERATION

5.1 ADJUST ANGLE

* The angle of gun tube can be adjusted freely. There are 5 angles, and each angle is spaced 15 degrees apart. Please install safety shaft to the position required before adjustment and pull up lock pin to adjust the angle.

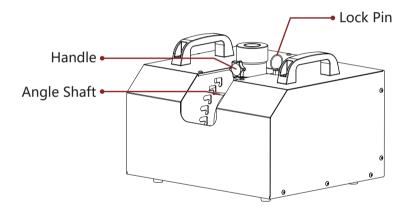


5.2 INSTALL MACHINE

Install machine on the solid horizontal ground or truss, through four M10 nuts on the base-plate.

5.3 INSTALL BUTANE GAS

*Install tank: Combine tank's gas with \frown , and spin to igodot .

*Remove tank: Spin tank to 🗂 for removing it.

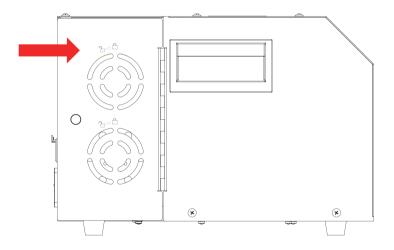



If the tank can't be installed successfully, please check buckle is in the right place.



5.4 FILL GRANULE


Spark Fabrica Granule is the consumable specially designed for spark machine, to simulate cold fountain re works eect for stage.

*Tear the vacuum package of granule, and fill the granule into the nozzle of Kungfupao.



CAUTION Please do not aim Nozzle as person or other things.

5.5 Silo installation and Angle adjustment



Place the silo into the spout and secure it with torx screws. (as shown below) The machine can adjust a total of 5 nozzle angles. Each Angle is 15 degrees apart. Before adjusting the Angle, please install the safety shaft to the position that needs to be adjusted, and then pull up the locating pin to adjust the nozzle Angle.

6 START TO OPERATE

6.1 TURN ON MACHINE'S POWER

AC power supply: Turn on the power switch, the RUN indicator light is lit, which means the power is connected. It indicates that no consumables are added when the LCD displays E1. There are 2 ways of controlling this product, namely DMX control and pulse control. Pulse control only has a working mode of "press once and play once".

6.2 DMX CONTROL

Use DMX cable to connect 512 console and machines' DMX IN interface. DMX OUT can connect multiple machines, and set the ADDRESS code of DMX for each machine after connection. This product has 2 channels mode. Please refer to screen operation guide to set DMX parameters ,and please do not set address code repeatedly.

6.3 IMPULSE CONTROL

Use IMPULSE control: Input a controlled DC12V signal into the IMPULSE interface to control the machine to start.

6.3 DISCONNECT POWER AND CLEAR

*Turn off the machine.

- * Disconnect power and DMX signal cable.
- *Remove gas tank and store it in a cool, well-ventilated place to avoid direct sunlight.

*Check if there is foreign matter in machine and remove it.

ww.sparkfabrica.com


7 FAILURE HANDLING

Display Code	Error Information	Solution
E1	Lack of granule	Replace granule
E3	Gas leakage fault	Check the leakage and replace the pipe

8 WARRANTY INSTRUCTIONS

Sincere thanks for your choosing Kungfupao SF-K2, you will receive quality servicefrom us.

The product warranty period is 3 year. If there are any quality problems within 7 days aftershipping out from our factory, we can exchange a brand new same model machine for you.We will offer free of charge maintenance service for machines which with hardwaremalfunction (except for the instrument damage caused by human factors)in warrantyoeriod. Please don't repair machine without factory permission.Below situations NOT included in warranty service:

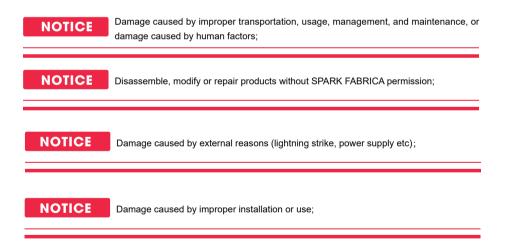

SPARK FABRICA

NOTICE

For product damage not included in warranty range, we can provide paid service.

www.sparkfabrica.com

*Invoice and warranty card are necessary when applying for maintenance service from SPARK FABRICA.

9 WARRANTY CARD

WARRANTY CARD

Product Name:	Serial No:	
Purchase Date:		
Tel:		
Address:		
Info.Feedback About The Problem:		
Actual Problem:		
Maintenance Detail:		
Service Engineer:	Service Date:	



www.sparkfabrica.com



You Tube

marketing@sparkfabrica.com

+86 138 7585 1139