


cod. 416

Lupo
Made in Italy

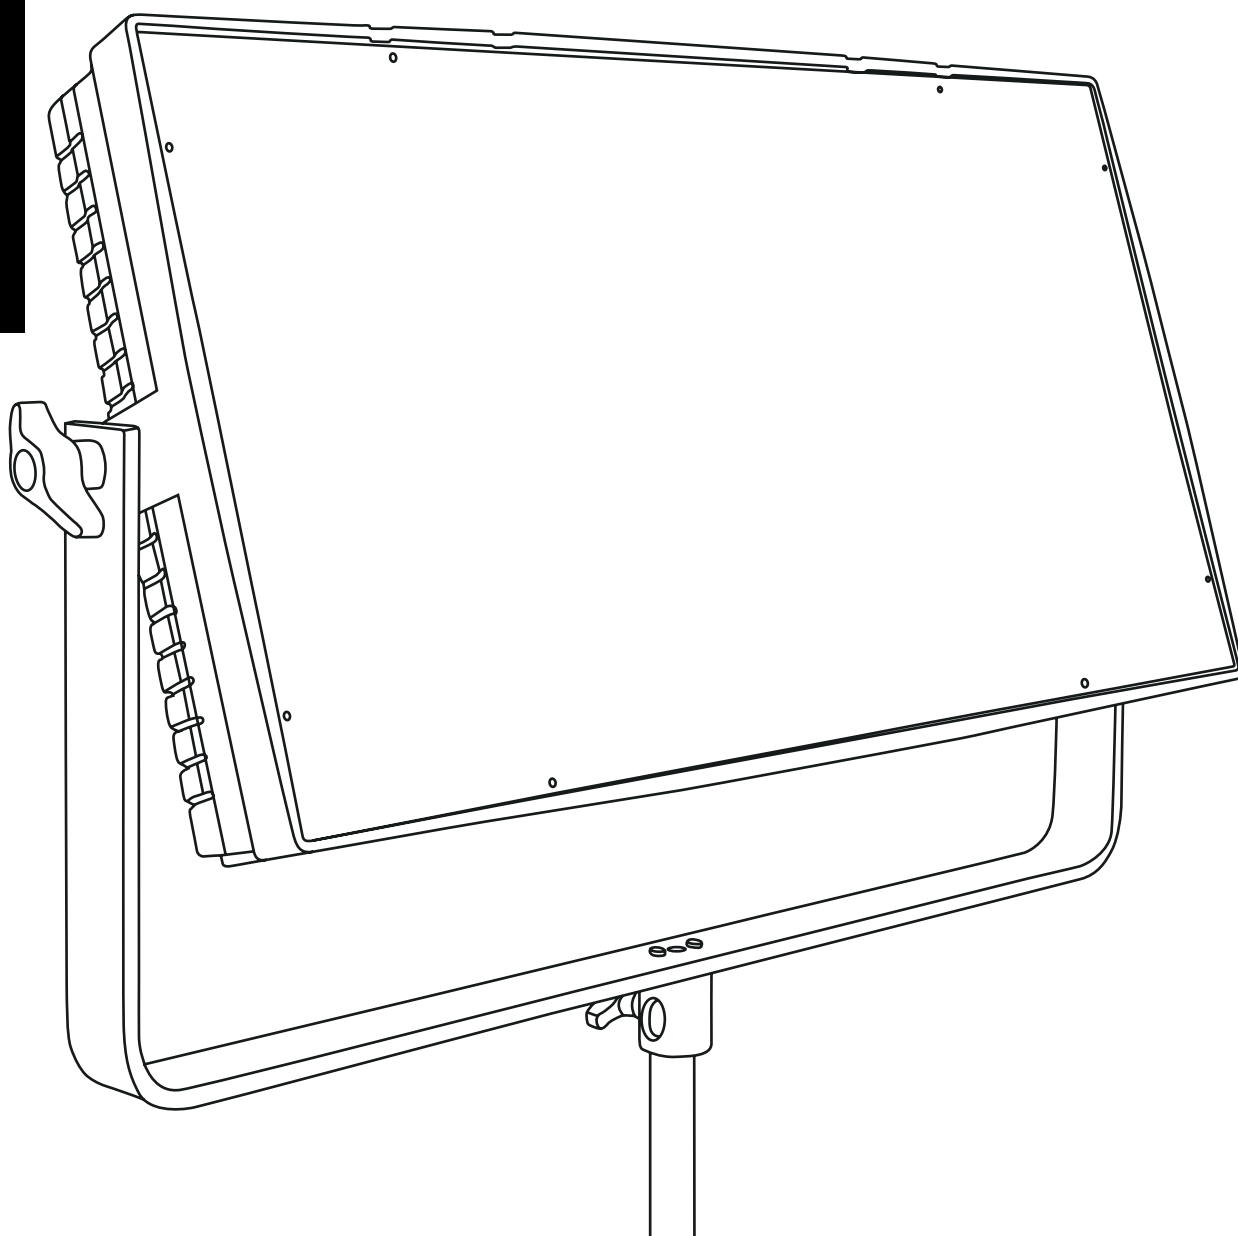

**SUPERPANEL
SOFT FULL
COLOR 60**

Technical features

Dimensions	65 cm x 34 cm x 11 cm
Weight	9 kg
CRI (Colour Rendering Index)	> 95, typical 96
Dimmer 0 – 100	included
Dimming curves mode	Linear, Exponential, Logarithmic
DMX module	included
DMX (bit)	8 bit and 16 bit
Connection for 2 x 14.8 V battery with standard XLR 4 pin connector	included
Standard XLR 5 pin connectors for connection to DMX console	included
Watt consumption	400 W
Colour temperature	2800 K – 10000 K
Voltage AC	90 V – 240 V
Frequency (input)	50/60 Hz
Compliance	CE

Photometric data

Distance	5600 K	3200 K
Lux at 1 m	8500	7600
Lux at 2 m	2400	2300
Lux at 3 m	1250	1180
Lux at 4 m	790	760
Lux at 5 m	590	560

Mode options

CCT (Correlated Color Temperature)

Mode for variable color temperature control from 2700K to 10000K with the addition of plus and minus green/magenta offset.

HSI (Hue, Saturation and Intensity)

Mode for full-color control.

RGBW

Mode for control of Red, Green, Blue and White independently.

Preset

Mode for a selected variety of gels.

Special Effects

Include Strobe – Party – Copcar – Disco – Fire – Candle – Television – Lightning – Paparazzi.

