

# Studio Due®

emotion and creativity in light



## Archibar SL150-i inground



The ARCHIBAR-i SL150 RDM is a new version of the Archibar line.  
INGROUND LED linear bar which combines aesthetic and resistance with ideal performance in a versatile projector.  
Waterproof and highly resistant.

RGBW and MONOCHROMATIC light source as well as in WHITE BALANCE.  
RDM / DMX Protocol. Configuration by DRS Setup.  
Available 900-600-300mm lenght. Manual tilt of the lighting projection at 0° - 3° - 6°.

### TECHNICAL FEATURES




[www.studiodue.com](http://www.studiodue.com)

ITEM	FIXTURE	[ KEY features ] 900mm	[ KEY features ] 600mm	[ KEY features ] 300mm
LEDs	RGBW	12 (5050-20W-RTBH)	8 (5050-20W-RTBH)	4 (5050-20W-RTBH)
Total light power		40W	32W	28W
Lumen		R 750, G 1800, B 300, W 1700	R 500, G 1200, B 200, W 1130	R 250, G 600, B 100, W 570
Optics		25° (38 mm lenses) - On request: 8°, 15°, 40°, 60°, 10°x30° - Filters 17°, 34°, 10°x60°		
Tilt		manual Tilt adjustment at 0° - 3° - 6°		
Power consumption		45W	37W	30W
Voltage range		Universal 100 - 240Vac		
Frequency range		47-63Hz		
Current		0.2A@230VAC	0.17A@230VAC	0.13A@230VAC
Active Power factor		PF>0.97@230VAC		
Physical		1063x182x173 mm (900mm)	763x182x173 mm (600mm)	463x182x173 mm (300mm)
Weight		15 Kg (900mm)		
Control		Standard interface: RS-485, Protocol: RDM / DMX 512		
Connections		Signal: 3 wires cable 70cm. with bare ends possibility to link up to 16 devices at 230V or 8 devices at 120V in chain. Available as accessories: Wireless DMX receiver Main Power: 3 wires cable 70cm. with bare ends		
Setup		RDM Control/configuration or individually by DRS (remote control device) Dedicated DMX channel for white balance DMX or Auto mode with Master-Slave function Intelligent temperature control Halogen simulation CYM simulation Flicker-free function Smooth dimming function		
DMX channels		9CH mode, 6CH mode, 5CH mode, 4CH mode		

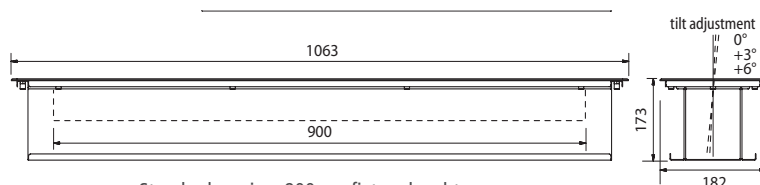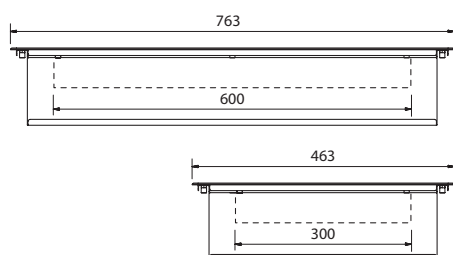


Standard version: 900mm fixture lenght  
On request: 600mm and 300mm fixture lenght



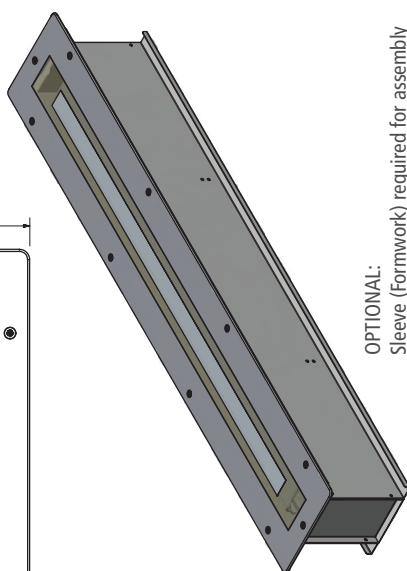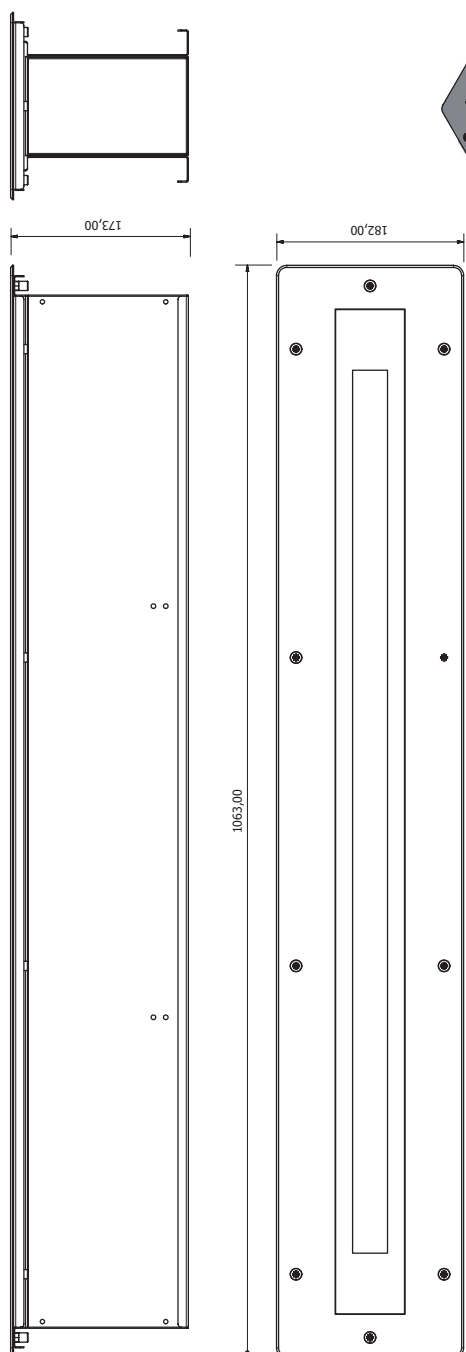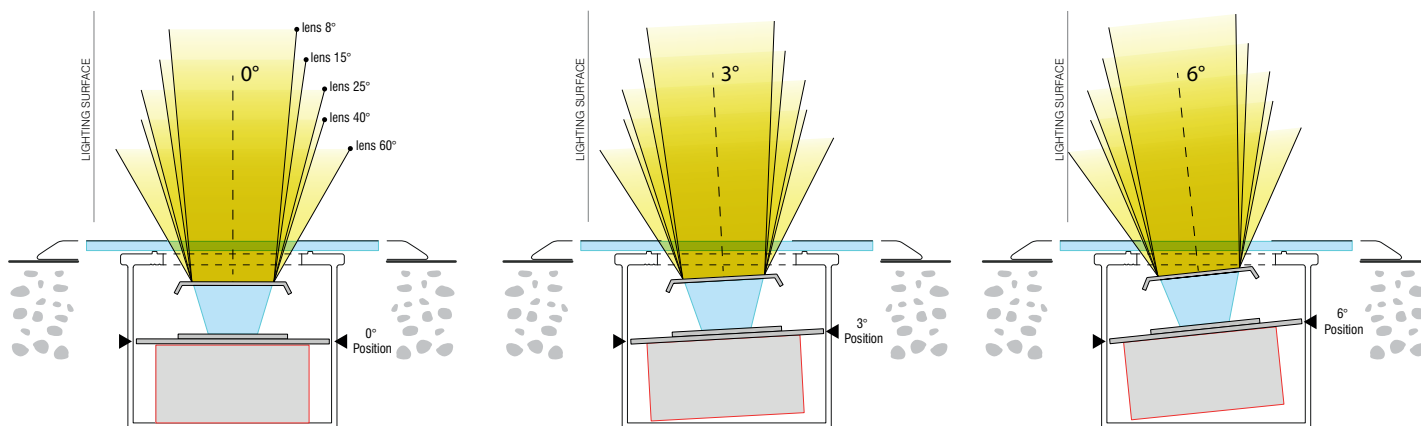

OPTIONAL:  
Sleeve (formwork) required for assembly

⚠ NOT SUITABLE FOR VEHICLES  
NON CARRABILE

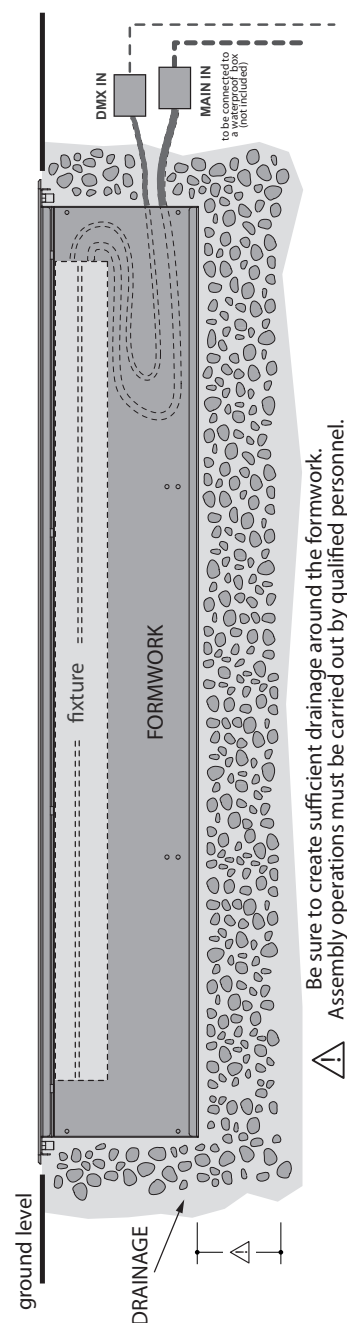

⚠ Be sure to create sufficient drainage around the formwork.  
Assembly operations must be carried out by qualified personnel.